


### DIM

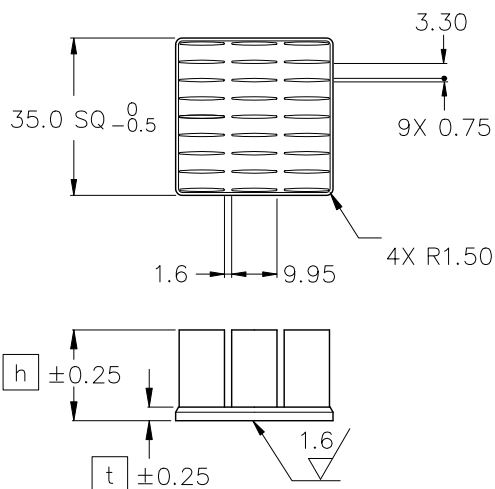


MATERIAL : A 6063  
FINISH : BLACK ANODIZE

MODEL	HEIGHT [h]	THICKNESS [t]	WEIGHT (grams)	
LPD35-3B	3	2.0	7.2	
LPD35-4B	4		7.6	
LPD35-5B	5		8.1	
LPD35-6B	6		8.5	
LPD35-7B	7		8.9	
LPD35-10B	10		3.0	12.8
LPD35-12B	12			13.6
LPD35-15B	15	14.9		
LPD35-20B	20	17.1		
LPD35-25B	25	19.2		
LPD35-30B	30	21.3		
LPD35-35B	35	23.5		


Dimensions : mm

### DATA

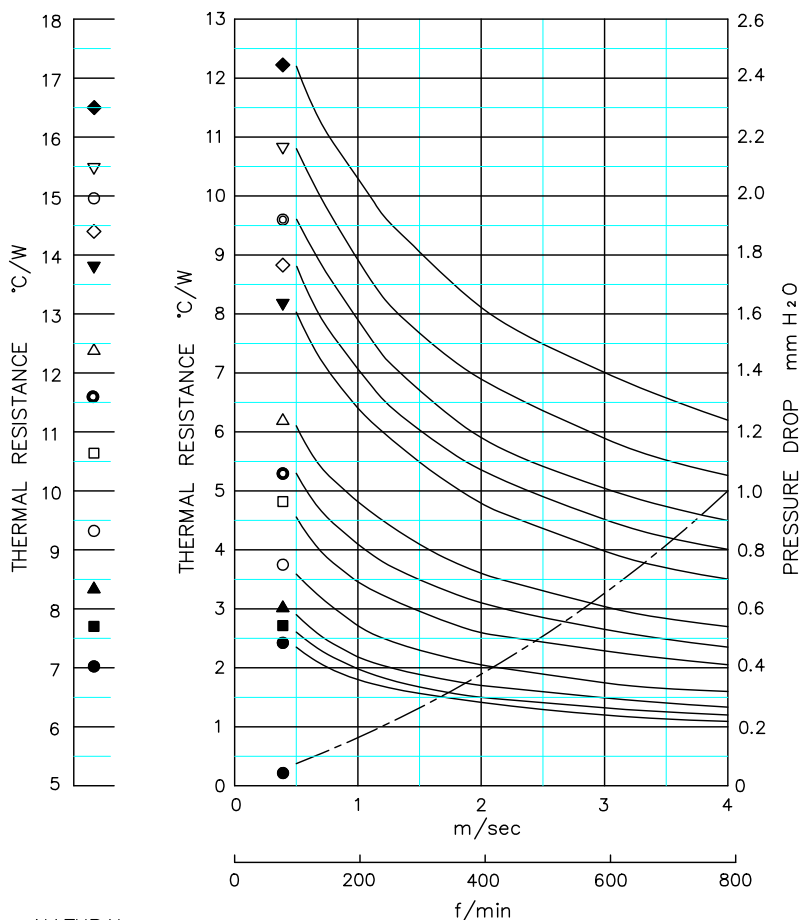

- ◆ LPD35-3B
- ▽ LPD35-4B
- ◎ LPD35-5B
- ◇ LPD35-6B
- ▼ LPD35-7B
- △ LPD35-10B
- LPD35-12B
- LPD35-15B
- LPD35-20B
- ▲ LPD35-25B
- LPD35-30B
- LPD35-35B

- DUCTED CONDITION  
DUMMY HEATER SIZE: 12.7 SQ  
THERMAL RESISTANCE ———  
PRESSURE DROP - - - - -
- NATURAL CONVECTION  
DUMMY HEATER SIZE: 12.7 SQ  
DISSIPATED POWER: 4.7(W)



NOTE ORIENTATION OF HEAT SINK USED FOR NATURAL CONVECTION TESTING

- BASED ON ALPHA'S STANDARD TEST PROCEDURE.  
REFER TO TECHNICAL INFORMATION.